



WEVER & DUCRÉ
LIGHTING

BOX WALL OUTDOOR 4.0

740248W2

Project _____

Type _____

Notes _____

Quantity _____

Date _____

GENERAL

Wall _____

Surface _____

Signal White _____

IP65 _____

Exterior _____

Total 400 lm _____

9003^a _____

LED

2700 K _____

CRI 80 _____

L90 / 50000 h _____

3-step binning _____

PHYSICAL

Length 100 mm _____

Width 100 mm _____

Height 160 mm _____

0.86 kg _____

ELECTRICAL

phase-cut dim _____


220 - 240 V _____

Total connected power 5.5 W _____


PC1 _____

Safety distance 0.3 m _____

^a RAL Palette colors may deviate slightly due to production conditions.

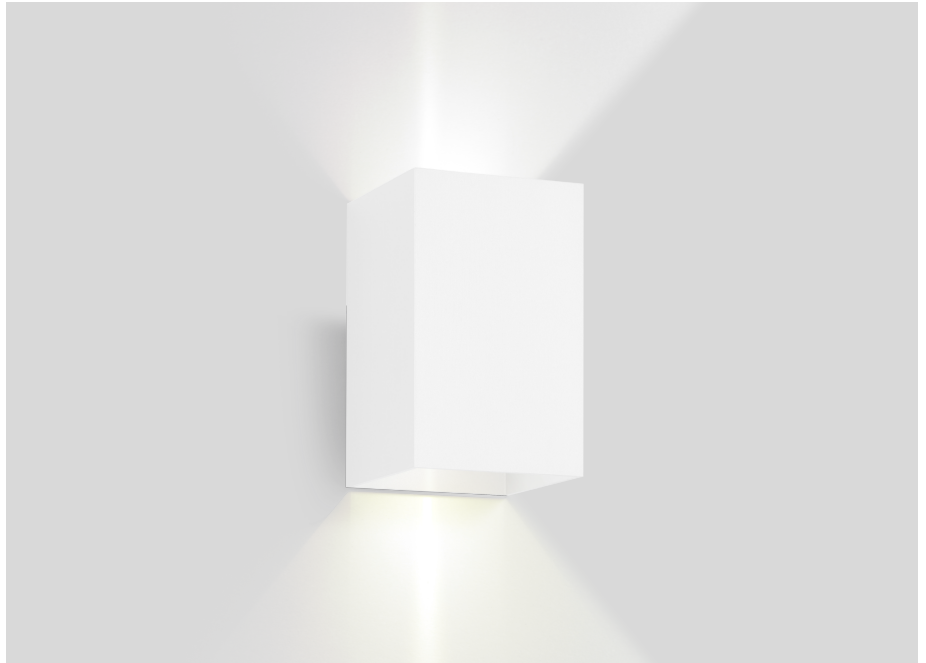

IP65 $\pm 0,3\text{m}$





WEVER & DUCRÉ
LIGHTING

BOX WALL OUTDOOR 4.0

740248W2

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.97	0.95	0.93	0.9	0.9
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.