

QUADRA ICE

Design by Proli Diffusion Studio.

VIBIA
LIGHT IS CREATION

Reference

1129.

Application

Ceiling Lamps

Installation type

Surface

Description

Light for ceiling fitting, in optical glass to fit perfectly into the setting as it has no profile.

Diffuser

Optical-glass diffuser

Materials


Diffuser: Glass

Finish



1129-00 White glass (RAL 9016)


Sketch



Electrical characteristics

1 x R7s 117mm 230V 230W Eco

Total 230.0 W



Fixture: 3444 lm 15 lm/W

Driver included: CV - Contant Voltage 230V 50Hz

Physical characteristics

1 Box / 0.22 x 0.46 x 0.46 m. / Vol. 0.0465 m³ /

Gross weight 3.0 kg. / Net weight 2.7 kg.


Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 68.88%

Coordinate system : CG

Total flux : 5000.00 lm

Maximum value : 133.39 cd/klm


Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=3.00m

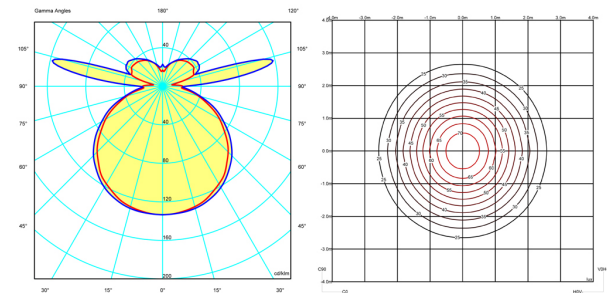

Certificates

